

# BARACUDA®

THE TRUSTED NAME IN POOL CARE

Founded in the 1970s, BARACUDA® offers complete pool care solutions trusted worldwide for quality, simplicity and ease of use for everyday pools.



## Aquantis™

Single Speed Pump

### Versatility meets simplicity



QUALITY  
PRICE

#### SMART CHOICE, SOLID RESULTS

When you need dependable performance without overspending, this pump delivers. With Class F motor insulation and IPX5 protection, it's built to handle everyday use with confidence.



FITS EVERY  
POOL

#### ONE PUMP, TOTAL VERSATILITY

Whether you're upgrading an existing system or installing from scratch, this pump adapts easily. It comes in a range of power ratings and includes multiple inlet fitting options.



RELIABLE  
FLOW

#### CONSISTENT PERFORMANCE

Built for small to medium-sized pools, this pump ensures steady flow circulation with minimal effort.


# Aquantis™

## Single Speed Pump


### TECHNICAL DATA

Models		30	35	40	50	75	100	150	200
SKU Codes		77802	77803	77804	77805	77806	77807	77808	77809
Voltage	V	230	230	230	230	230	230	230	230
Frequency	Hz	50	50	50	50	50	50	50	50
Power supply	phases	1	1	1	1	1	1	1	1
Flow at Nominal Head	m <sup>3</sup> /h	4.1	5.8	8.9	11.2	12.5	15.0	19.7	22.5
Nominal Head	m.c.w.	8	8	8	8	8	10	10	10
Max. Working Pressure	bars	2.0	2.0	2.0	2.0	2.0	3.0	3.0	3.0
Motor Rated Power	kW	0.24	0.27	0.30	0.40	0.55	0.75	1.10	1.50
Max. Absorbed Power	kW	0.35	0.45	0.50	0.75	0.85	1.10	1.60	2.20
Maximum Head	m.c.w.	9.5	10.0	12.0	12.5	12.5	16.0	18.0	19.5
Maximum Flow rate	m <sup>3</sup> /h	9.5	11.0	14.0	15.5	16.5	22.5	28.0	31.0
Max. Water Temperature	°C	35	35	35	35	35	35	35	35
Max. Ambient Temperature	°C	40	40	40	40	40	40	40	40
Threaded ports	inches	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	-	-	-
Pipe fittings	mm	50	50	50	50	50	50 or 63	50 or 63	50 or 63
	inches	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2" or 2"	1 1/2" or 2"	1 1/2" or 2"
Prefilter Volume	liters	0.7	0.7	0.7	0.7	0.7	1.7	1.7	1.7
Product Size	A (mm)	180.0	180.0	180.0	180.0	180.0	220.0	220.0	220.0
	H (mm)	188.5	188.5	188.5	188.5	188.5	256.0	256.0	256.0
	L (mm)	374.0	374.0	405.0	405.0	405.0	518.0	548.0	548.0
Net weight	kg	6.0	6.1	6.4	7.1	7.4	12.1	15.2	16.9
Packaging volume	m <sup>3</sup>	0.014	0.014	0.015	0.015	0.015	0.033	0.035	0.035

#### Models: 30 - 75

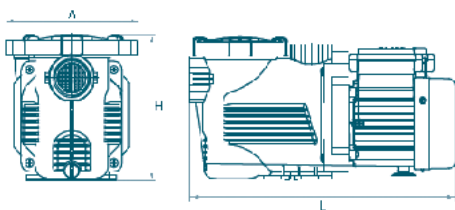

#### Models: 100 - 200

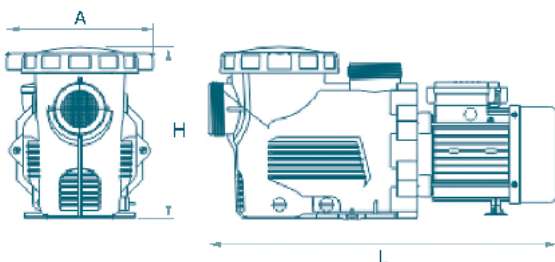

#### Performance Curves

